


CB-114 Series

4-port RS-232/422/485 PC/104-Plus modules

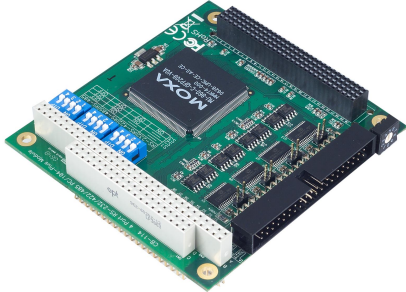

Features and Benefits

- 921.6 kbps maximum baudrate for fast data transmission
- On-chip hardware and software flow control
- Serial interface is DIP switch selectable
- Onboard Tx and Rx LED indicators for each port
- Supports Windows, Windows CE 5.0/6.0, and Windows XP Embedded operating systems
- Wide-temperature model available for -40 to 85°C environments

Certifications



Introduction

The CB-114 PC/104-Plus modules come with 4 RS-232/422/485 ports, and can be used with PC/104-Plus CPU boards that accept the PC/104-Plus expansion interface. Optional DB9 and DB25 connection cables are available for connecting to serial devices, and versatile driver support makes the modules suitable for a wide range of applications. The CB-114 modules can be used on the PC/104-Plus (PCI) bus, and provide a reliable, high-performance solution for multipoint serial communication.

Specifications

Serial Interface

Comm. Controller	16C550C or compatible x 4
Bus	PC/104 plus bus
Connector	40-pin box header
DIP Switches	Serial interface
IRQ	Assigned by BIOS
I/O Address	Assigned by BIOS
FIFO	128 bytes
Max. No. of Boards per PC	8
No. of Ports	4
Serial Standards	RS-232, RS-422, RS-485
Baudrate	50 bps to 921.6 kbps
Data Bits	5, 6, 7, 8
Stop Bits	1, 1.5, 2
Parity	None, Even, Odd, Space, Mark
Flow Control	None, RTS/CTS, XON/XOFF

Serial Signals

RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND

Serial Software Features

Windows Drivers	DOS, Windows 95/98/ME/NT/2000, Windows XP/2003/Vista/2008/7/8/8.1/10 (x86/x64), Windows 2008 R2/2012/2012 R2 (x64), Windows Embedded CE 5.0/6.0, Windows XP Embedded
Linux Drivers	Linux kernel 2.4.x, Linux kernel 2.6.x, Linux kernel 3.x
UNIX Drivers	QNX 6, Solaris 10, UnixWare 7

Power Parameters

Input Current	164 mA @ 5 VDC
Input Voltage	5 VDC

Physical Characteristics

Dimensions	90 x 96 mm (3.54 x 3.78 in)
------------	-----------------------------

LED Interface

LED Indicators	Built-in Tx, Rx LEDs for each port
----------------	------------------------------------

Environmental Limits

Operating Temperature	CB-114: 0 to 55°C (32 to 131°F) CB-114-T: -40 to 85°C (-40 to 185°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 0.5 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF
Environmental Testing	IEC 60068-2-1 IEC 60068-2-2 IEC 60068-2-3 IEC 60068-2-14
Safety	EN 60950-1, UL 60950-1
Vibration	IEC 60068-2-6
Declaration	
Green Product	RoHS, CRoHS, WEEE

MTBF

Time	381,081 hrs
Standards	Telcordia (Bellcore), GB

Warranty

Warranty Period	5 years
Details	See www.moxa.com/warranty

Package Contents

Device	1 x CB-114 Series PC/104-Plus module
Documentation	1 x document and software CD 1 x quick installation guide 1 x warranty card

Ordering Information

Model Name	Serial Bus	Serial Standards	No. of Serial Ports	Operating Temp.
CB-114	PC/104-Plus	RS-232/422/485	4	0 to 55°C
CB-114-T	PC/104-Plus	RS-232/422/485	4	-40 to 85°C

Accessories (sold separately)

Cables

CBL-F40M25x4-50	F40 to 4 x DB25 male cable, 50 cm
CBL-F40M9x4-50	F40 to 4 x DB9 male cable, 50 cm

© Moxa Inc. All rights reserved. Updated Nov 12, 2018.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.