


## Smart Switches that are Slim, Simple, and Viewable on SCADAs

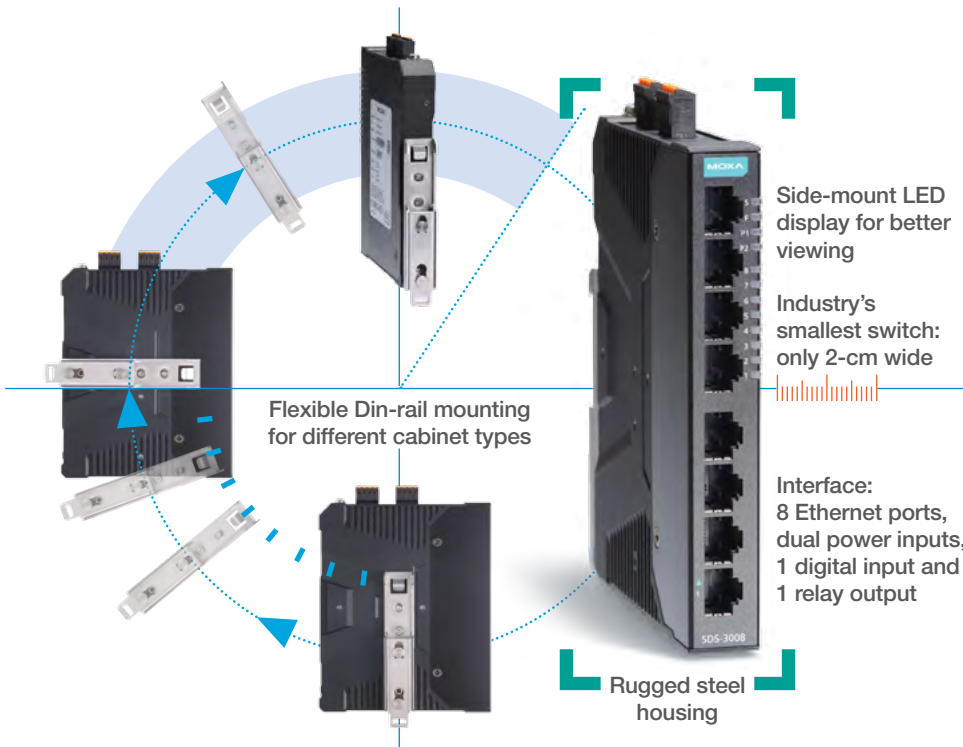

**3** industrial protocols, one-click setup

**2** installation options: DIN-rail and rackmount

**1**-page dashboard and setup



**SDS-3008**

Smart switch



**EDS-200A**

Unmanaged



**EDS-400A**

Managed

	SDS-3008 Smart switch	EDS-200A Unmanaged	EDS-400A Managed
<b>Port Configuration</b>	8 FE copper ports	5 and 8 FE ports with up to 2 fiber ports	5 and 8 FE ports with up to 3 fiber ports
<b>Max. Number of VLANs</b>	8	N/A	64
<b>Redundancy</b>	<ul style="list-style-type: none"> <li>• Redundant power inputs</li> <li>• RSTP (IEEE 802.1D-2004)</li> </ul>	<ul style="list-style-type: none"> <li>• Redundant power inputs</li> </ul>	<ul style="list-style-type: none"> <li>• Redundant power inputs</li> <li>• RSTP (IEEE 802.1D-2004), Turbo Ring v1/v2, Turbo Chain</li> </ul>
<b>Dimensions</b>	20 x 135 x 111 mm (0.79 x 5.32 x 4.37 in)	<ul style="list-style-type: none"> <li>• EDS-205A : 30 x 115 x 70 mm (1.18 x 4.52 x 2.76 in)</li> <li>• EDS-208A : 50 x 115 x 70 mm (1.96 x 4.52 x 2.76 in)</li> </ul>	53.6 x 135 x 105 mm (2.11 x 5.31 x 4.13 in)
<b>Management and Security</b>	<ul style="list-style-type: none"> <li>• Web console, MXview, ABC-02-USB</li> <li>• EtherNet/IP, PROFINET, and Modbus/TCP</li> <li>• Port disable and IEC 62443-4-2 Level 1</li> </ul>	DIP switch for enabling broadcast storm protection	<ul style="list-style-type: none"> <li>• Web console, Telnet/Serial Console, MXstudio, ABC-01, QoS, Rate limiting, Multicast filtering, Link-swap fast recovery</li> <li>• EtherNet/IP, PROFINET, and Modbus/TCP</li> <li>• Port disable</li> </ul>
<b>Certifications</b>	CE/FCC, UL61010-2-201, EN 60950-1 (LVD) , EN 50121-4	CE/FCC, UL 508, UL 60950-1, EN 60950-1 (LVD)*, ATEX/C1D2, DNV/GL, LR, ABS, NK, NEMA TS2, EN50121-4	CE/FCC, UL508, EN 60950-1 (LVD), ATEX/C1D2, NEMA TS2, EN 50121-4
<b>Target Applications</b>	Factory automation and Machine OEM	Factory automation, Process automation, Marine, O&G, ITS, Wayside communication	Process automation, O&G, ITS, Wayside transportation communication