





Test probes

PRUEF 1610 FT Au

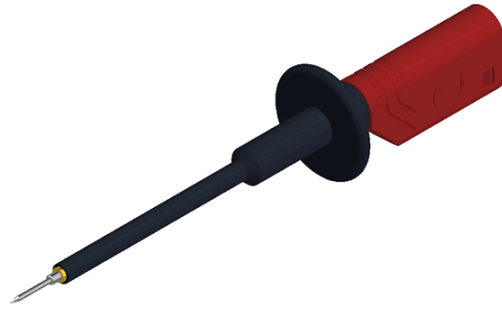

Product	PRUEF 1610 FT Au
description	Safety test probe with shatter-proof insulated sleeve, spring-loaded and slender stainless steel tip. 2 mm diameter gold-plated brass socket connection, stackable with 2 mm safety measuring lead MVL S WS. Oxide layers can be penetrated by this test probe.
article-no. / *colour	9750187xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black </div> <div style="text-align: center;">  01 red </div> </div> <div style="text-align: right; border: 1px solid black; padding: 2px; width: 30px; margin-left: auto;">Au</div>
drawing	
technical data	
connection	unsprung socket 2 mm
rated voltage ⁽¹⁾	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT II
rated current ⁽¹⁾ (consider derating curve)	10 A
material socket	tip: stainless steel-BR-socket: brass
housing material	PA
temperature range acc. To IEC61010 ⁽²⁾	-25 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2
standard	IEC 61010

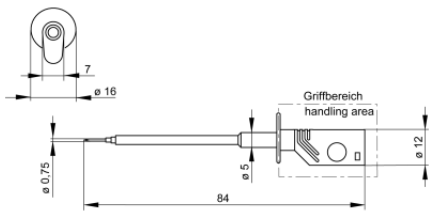2 mm safety system

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

stand: 04.07.2018