

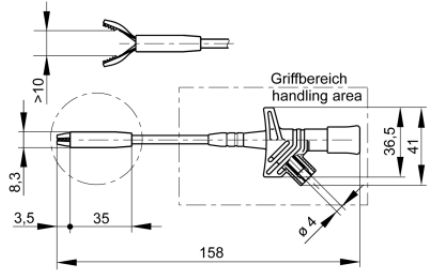


Clamp-type test probe

KLEPS 2800



Product	KLEPS 2800
description	Safety clamp-type test probe with insulated wide opening grip claws for contacting large measuring areas and leads with large cross-sections. 4 mm brass socket connection. Connects with safety measuring leads.
article-no. / *colour	9723081xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black </div> <div style="text-align: center;">  01 red </div> </div>
drawing	
technical data	
connection	unsprung socket 4 mm
rated voltage ⁽¹⁾	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current ⁽¹⁾ (consider derating curve)	20 A
material plug	spring steel
material socket	brass
housing material	PBT
temperature range acc. To IEC61010 ⁽²⁾	-25 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB
clamp type	grip claws, nickel plated
clamping range	10 mm

4 mm safety system

standard	IEC 61010
----------	-----------

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

stand: 04.07.2018