





Clamp-type test probe

KLEPS 60

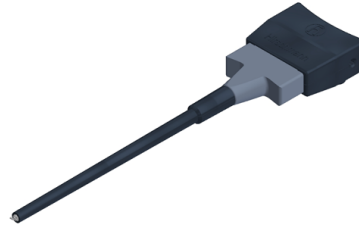

Product	KLEPS 60
description	Clamp-type test probe grip jaws and flexible shaft. The special form of the grip jaws permits clamping of pins and wires up to a maximum of 4 mm diameter. 4 mm diameter brass socket connection with additional screw connection, grip jaws additionally tin-plated.
article-no. / *colour	9730531xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black </div> <div style="text-align: center;">  01 red </div> </div>
drawing	
technical data	
connection	4 mm socket (unsprung) screw terminal
rated voltage ⁽¹⁾	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O ⁽³⁾
rated current ⁽¹⁾ (consider derating curve)	4 A
material socket	brass
temperature range acc. To IEC61010 ⁽²⁾	-25 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB
clamp type	grip jaws, tin plated
clamping range	4 mm
standard	IEC 61010

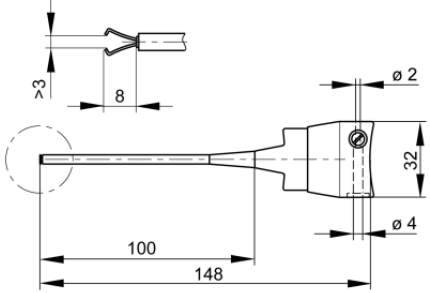4 mm system

- ⁽¹⁾ for normal environmental conditions -5°C to +40°C
⁽²⁾ contact the manufacturer for applications at deviating temperature ranges
⁽³⁾ Other circuits that are not directly connected to mains
stand: 09.07.2018