



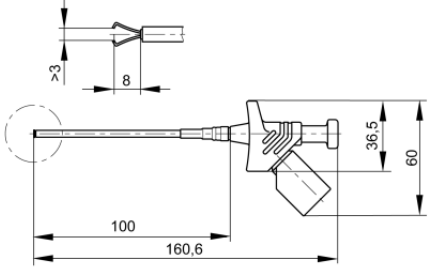
Clamp-type test probe



KLEPS 250



4 mm sliding sleeve system

Product	KLEPS 250
description	Contact-protected clamp-type test probe with rotating grip jaws and flexible shaft. The grip jaws allows clamping of pins and wires up to a max. of 4 mm diameter. Brass 4 mm diameter contact-protected socket connection. Connects with MLN and MLB measuring leads.
article-no. / *colour	9735281xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black </div> <div style="text-align: center;">  01 red </div> </div>
drawing	
technical data	
connection	unsprung socket 4 mm
rated voltage ⁽¹⁾	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O ⁽³⁾
rated current ⁽¹⁾ (consider derating curve)	4 A
material socket	brass
housing material	PF
temperature range acc. To IEC61010 ⁽²⁾	-25 °C to +70 °C
flammability class acc. to UL 94 (only valid for basic material of housing)	V-0
clamp type	rotating grip jaws, tin plated
clamping range	4 mm
standard	IEC 61010

- ⁽¹⁾ for normal environmental conditions -5°C to +40°C
⁽²⁾ contact the manufacturer for applications at deviating temperature ranges
⁽³⁾ Other circuits that are not directly connected to mains
stand: 09.07.2018