

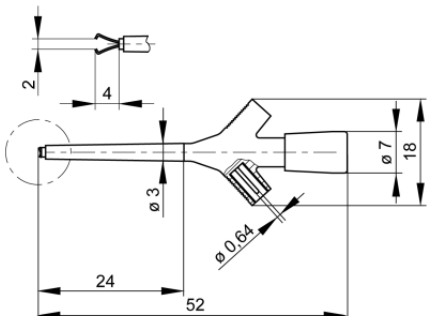


Clamp-type test probe

KLEPS 3 ST



Product	KLEPS 3 ST
description	Miniature clamp-type test probe with rotating grip jaws. Suitable for very thin wires and densely packed contacts. Connects with MKL... and MAL...
article-no. / *colour	9735921xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black </div> <div style="text-align: center;">  01 red </div> </div>
drawing	
technical data	
connection	unsprung pin Ø 0.64 mm
rated voltage ⁽¹⁾	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O ⁽³⁾
rated current ⁽¹⁾ (consider derating curve)	2 A
material plug	brass, gold plated
housing material	PBT
temperature range acc. To IEC61010 ⁽²⁾	-25 °C to +100 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB
clamp type	rotating grip jaws, tin plated
clamping range	3,5 mm
standard	IEC 61010

0.64 mm system

- ⁽¹⁾ for normal environmental conditions -5°C to +40°C
⁽²⁾ contact the manufacturer for applications at deviating temperature ranges
⁽³⁾ Other circuits that are not directly connected to mains
stand: 30.07.2018