

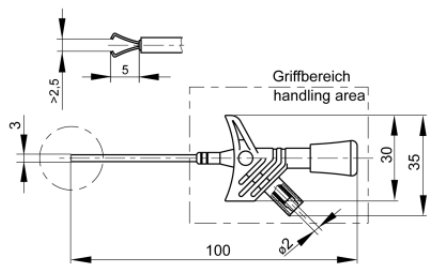


Clamp-type test probe

KLEPS 1600



Product	KLEPS 1600
description	Safety clamp-type test probe with rotating grip jaws and flexible shaft. Wires and pins up to a maximum diameter of 3 mm can be clamped thanks to the special form of the grip jaws. Ø 2 mm sockets-connection of brass gold-plated.
article-no. / *colour	9751061xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black </div> <div style="text-align: center;">  01 red </div> </div> <div style="text-align: right; border: 1px solid black; padding: 2px; width: fit-content; margin-top: 10px;">Au</div>
drawing	
technical data	
connection	unsprung socket 2 mm
rated voltage ⁽¹⁾	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT II
rated current ⁽¹⁾ (consider derating curve)	3 A
material socket	brass, gold plated
housing material	PA
temperature range acc. To IEC61010 ⁽²⁾	-25 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2
clamp type	rotating grip jaws, tin plated
clamping range	3 mm

2 mm safety system

standard	IEC 61010
----------	-----------

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

stand: 03.07.2018