
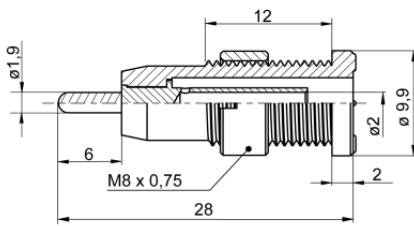


Sockets

MSEB 2630 S 1,9 Au



Product	MSEB 2630 S 1,9 Au
description	Miniature - safety built-in socket, 2 mm diameter, touch protected, 1,9mm soldering spike connection, gold-plated brass. For installation into switch- panels and equipment chassis with a wall thickness up to 8mm. Installation hole: 8mm diameter
operating instruction	BA254
article-no. / *colour	9754597xx  Au
drawing	
technical data	
connection	solder connection
rated voltage ⁽¹⁾	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current ⁽¹⁾ (consider derating curve)	10 A
material socket	brass, gold plated
housing material	PA
temperature range acc. To IEC61010 ⁽²⁾	-25 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2

2 mm safety system

standard	IEC 61010
----------	-----------

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

stand: 10.01.2019