


## Measuring leads

### MLB 25/1 V

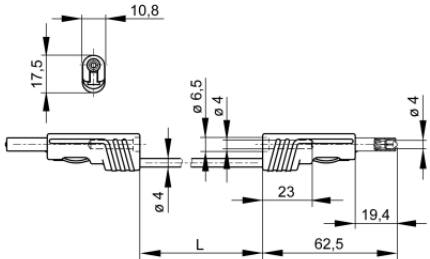

4 mm sliding sleeve system

Product	MLB 25/1 V
description	Contact protected test lead on both sides sprung plug $\varnothing$ 4 mm, insulated by latching and sprung insulated, which is only released by pressure on the lateral locking spring, and rigid socket $\varnothing$ 4 mm to the far pluginess. Highly flexible, double insulated stranded conductor with integrated color indicator for detecting damage to the insulation.
operating instruction	BA401
article-no. / *colour	9736441xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"><span style="color: black;">●</span> 00 black</div> <div style="text-align: center;"><span style="color: red;">●</span> 01 red</div> <div style="text-align: center;"><span style="color: blue;">●</span> 02 blue</div> <div style="text-align: center;"><span style="color: yellow;">●</span> 03 yellow</div> <div style="text-align: center;"><span style="color: green;">●</span> 04 green</div> </div>
drawing	
technical data	
rated voltage <sup>(1)</sup>	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O <sup>(3)</sup>
rated current <sup>(1)</sup> (consider derating curve)	16 A
material socket	contact pin: brass contact spring: copper - beryllium
housing material	PA
temperature range acc. To IEC61010 <sup>(2)</sup>	-15 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2
cable length	25 cm
conductor size	1 mm <sup>2</sup>

cable material	PVC
contact resistance	8,5 mOhm
standard	IEC 61010

<sup>(1)</sup> for normal environmental conditions -5°C to +40°C

<sup>(2)</sup> contact the manufacturer for applications at deviating temperature ranges

<sup>(3)</sup> Other circuits that are not directly connected to mains

stand: 20.07.2018