


BE-R-MOUNTINGSET


BE-R-MOUNTINGSET
 BE-R-MOUNTINGSET
 KIT DE MONTAGE BE-R



di-soric GmbH & Co. KG
 Steinbeisstraße 6
 DE-73660 Urbach
 Germany
 Tel: +49 (0) 7181/9879-0
 info@di-soric.de · www.di-soric.com

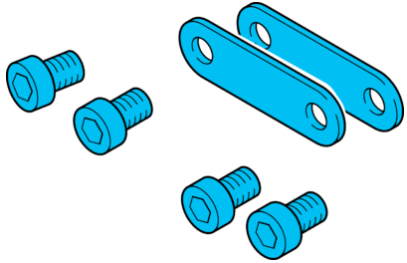

Stand 22.09.21, Änderungen vorbehalten
 As of 09/22/21, subject to change
 État 22.09.21, sous réserve de modifications




mm

Technische Daten	Technical data	Caractéristiques techniques	
Geeignet für	To be used for	Convient pour	Ringbeleuchtungen BE-R30..., Ringbeleuchtungen BE-R70... / Ringlights BE-R30..., Ringlights BE-R70... / Anneaux lumineux BE-R30..., Anneaux lumineux BE-R70...
Lochabstand	Hole spacing	Espacement des trous	25 mm
Größe	Size	Dimensions	35 x 10 x 2 mm
Material	Material	Matériau	Aluminium (eloxiert) / Aluminum (Anodized) / Aluminium (Anodisé)
Lieferumfang	Scope of delivery	Contenu de la livraison	2 Verbindungselemente, 4 Zylinderkopfschrauben M4x6 / 2 connecting elements, 4 cylinder head screws M4x6 / 2 éléments de liaison, 4 vis à tête cylindrique M4 x 6



BE-R-MOUNTINGSET

BE-R 安装支架套装

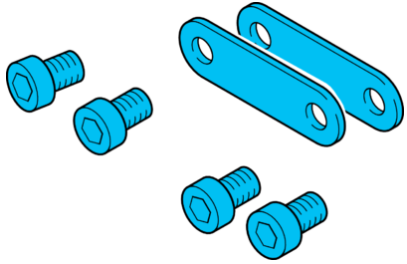


di-soric GmbH & Co. KG
Steinbeisstraße 6
DE-73660 Urbach
Germany
Tel: +49 (0) 7181/9879-0
info@di-soric.de · www.di-soric.com


207157



版本 21.09.22, 保留变更权



mm



技术数据

适合用于

环形光源 BE-R30..., 环形光源 BE-R70...

孔距

25 mm

尺寸

35 x 10 x 2 mm

材料

铝 (阳极氧化)

供货范围

2 个连接元件, 4 枚圆柱头螺丝 M4x6