
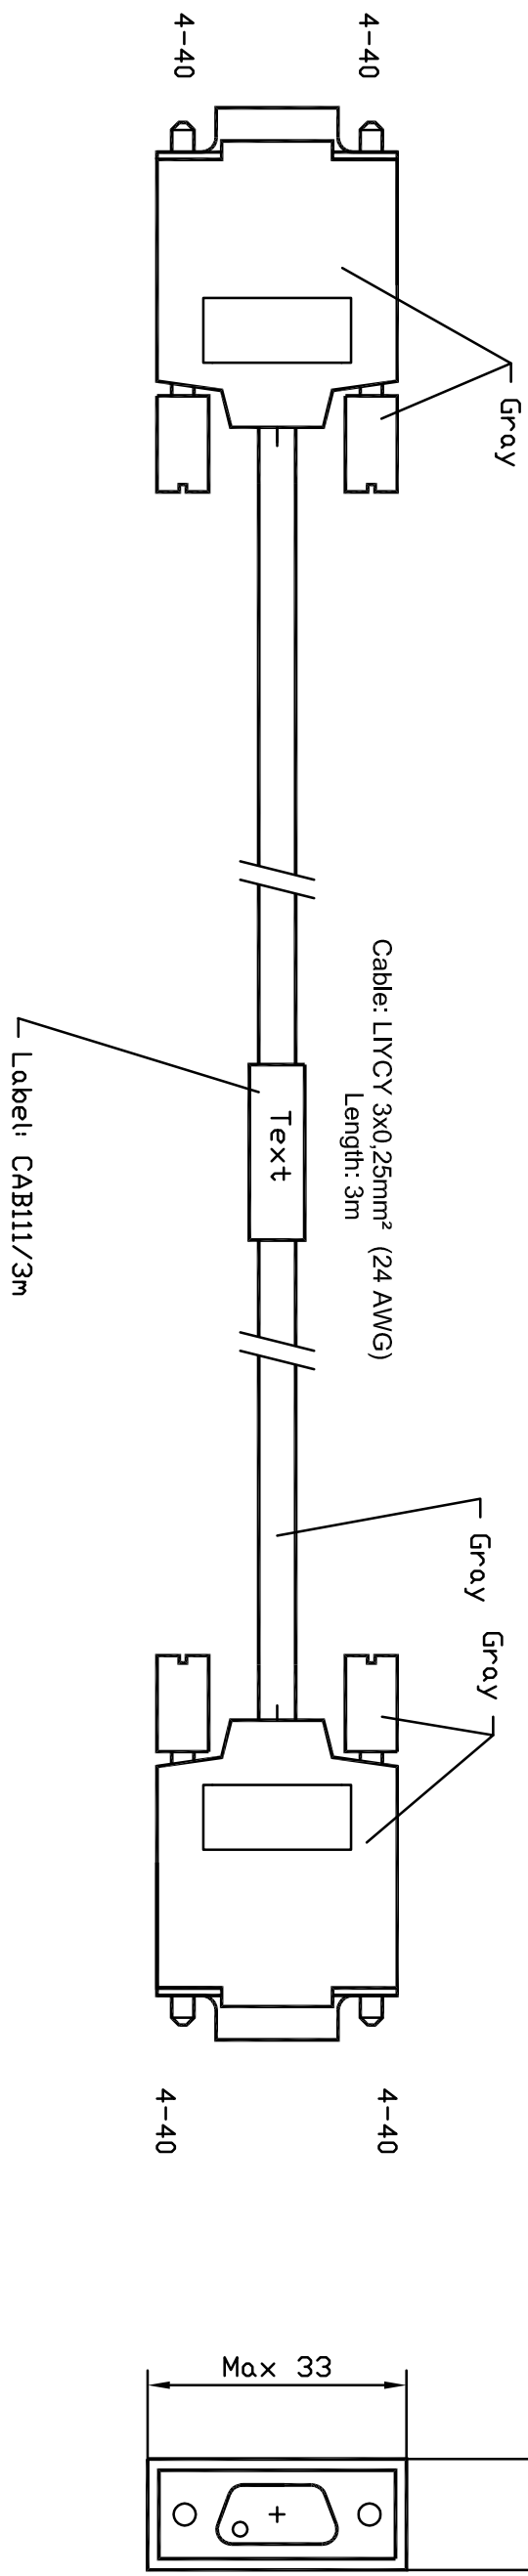



RS-232
9-pin D-sub Male

RS-232
9-pin D-sub Male

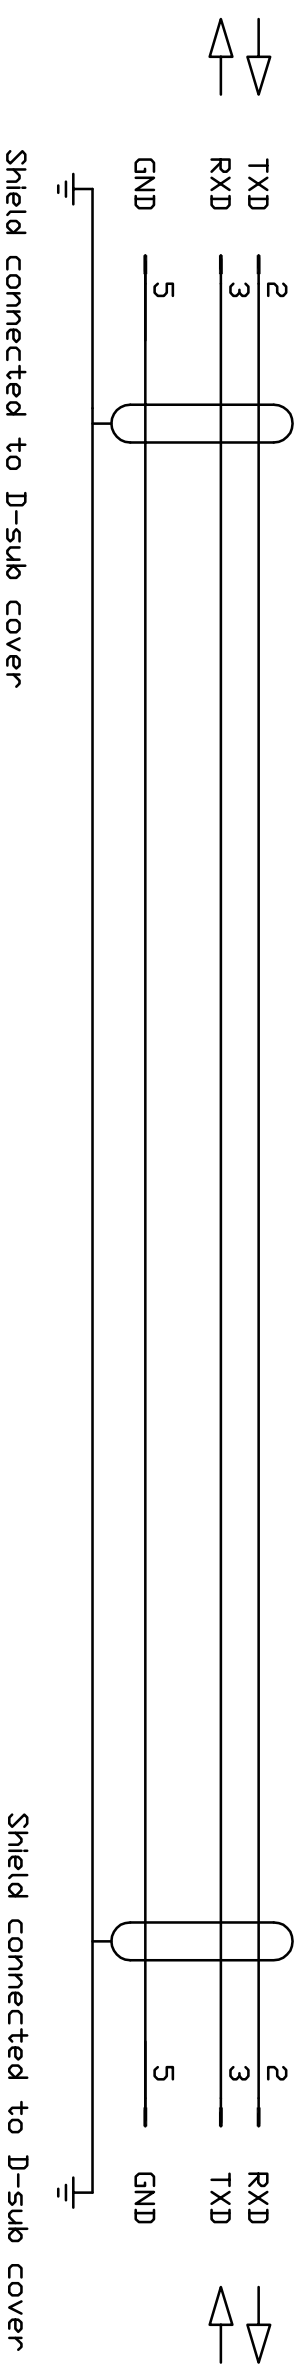

Note: Cable must follow the Beijer standard document I-4795 Connection of the cable shield to the D-sub

<p>This drawing is our intellectual and substantive property. It is a company secret, which may not be copied, duplicated or made accessible to third parties. It has to be returned to us upon demand and is not subject to a revision service.</p>		<p>Universal tolerances for linear and angular dimensions</p>		<p>Scale</p>	<p>Weight</p>	<p>Kg</p>
		<p>Date</p>	<p>Name</p>	<p>Designation</p>		
		<p>Drawn 13.01.12</p>	<p>H.Böhmler</p>	<p>CAB 111</p>		
		<p>Check</p>		<p>external cable, length 3m</p>		
		<p>Norm</p>		<p>TxA Soft PLC</p>		
		<p>CIS-No:</p>		<p>Metal cover connector</p>		
				<p>all views</p>		



<p>Ref. B</p>	<p>Revision Text</p>	<p>Date 13.05.11</p>	<p>Name Bö</p>	<p>Beijer ELECTRONICS</p>		<p>Subst. for:</p>	<p>Subst. of:</p>
				<p>Drawing number</p>	<p>CAB-27100-036A</p>		
				<p>Page</p>	<p>1</p>		
				<p>of 1 Pg</p>			