


TO SNAP-LOCK IN A .187$\pm .003$
 [4.75± 0.08] DIA. HOLE IN A
 .031-.078 [0.79-1.98] PANEL THICKNESS

- NOTES:
 1. MATERIAL: IMPACT MODIFIED NYLON 66
 UV STABILIZED UL 94 HB (RMS-73)
 2. COLOR: NATURAL
 3. ALTERNATE UNITS [mm] ARE FOR REFERENCE ONLY

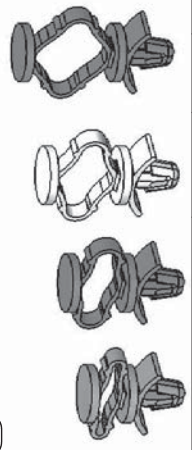

| PART NO. | | DIM. "A" | |
|----------|--|------------|--|
| PSC-1 | | 3/8 [9.5] | |
| PSC-2 | | 1/2 [12.7] | |
| PSC-3 | | 5/8 [15.9] | |
| PSC-4 | | 3/4 [19.1] | |

| | | | | | | | |
|---|---|--|------------|---------------------|----------|-------|-----|
| TITLE: PUSH SPACER, CUSHION | | FILE #: | PSC | DWN: | SK | APP: | SK |
| CREATED USING 3. SELEWORKS UNLESS NOTED XX=±.010 XXX=±.005 FRAC=±1/64 ANG=±1° | SHEET: 1 OF 1 | SHEET SIZE: | A | DT: | 07/07/05 | CHKD: | DJZ |
| RE: RICHCO, INC. | | RICHCO, INC. ENG@RICHCO-INC.COM (773) 539-4060 | | PART # SEE TABLE | | | |
| D | [CORRECT DIM FROM 7/32[5.3] TO 20R[5.3] ECN# 1386 | DZ | 10/24/2013 | UNITS: FINAL | | | |
| C | SEE ECN #1288 FOR CHANGES | SK | 11/29/2006 | PRINT TYPE | | | |
| B | SEE ECN #1121 FOR CHANGES | SK | 07/13/2006 | CA | | | |
| A | RELEASED FOR PRODUCTION | SK | 08/10/2005 | | | | |
| REV. | DESCRIPTION | ENGR. | DATE | | | | |