



### Elektrische Werte

\* Bemessungsstrom bis 75 A  
Durchgangswiderstand < 1 mOhm

### Werkstoff

Kontakt Messing, vergoldet

### Anschluß


Anschlußart crimp  
Anschlußbereich 1,5 - 10,0 mm<sup>2</sup>  
- für Isolationscrimp max Isolations  $\varnothing$  4,4  
Abisolierlänge 8 mm  
Crimpeinstellungen sind individuell zu wählen

### Mechanische Werte

Steckzyklen 500

### Werkzeuge (nicht im Lieferumfang enthalten)

analoge Crimpzange Best.-Nr. C0.008.00  
Positioniereinsatz für 3,6mm Kontakte Best.-Nr. C0.010.00

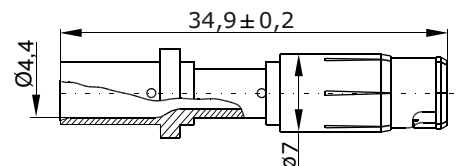

### Hauptabmessungen

Kontaktbuchse



### Electrical data

\*nominal current up to 75 A  
contact resistance < 1 mOhm

### Material

contact brass, gold plated

### Termination


kind of termination crimp  
cross section 1,5 - 10,0mm<sup>2</sup>  
- for insulation crimp max insulation Ø 4,4 mm  
stripping length 8 mm  
crimp settings select individually

### Mechanical data

mating cycles 500

### Tools (not included in delivery)

analog crimping tool order no.:C0.008.00  
positioner for 3,6mm contacts order no.: C0.010.00

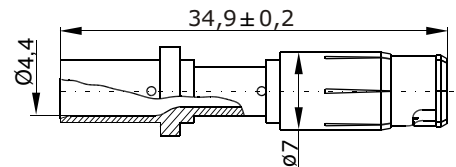

### Main dimension

contact socket

Y6.B114.00 issue: 22.07.2009/MH  
Copyright by INTERCONTEC Produkt GmbH, Germany.  
All rights reserved in case of a patent or GM registration.  
Violation will result in a claim for damages.  
All data is just for information. Before utilization of the stated information  
And data the user has to reassure the validity and topicality.  
Specifications are subject to change without notice.

INTERCONTEC Produkt GmbH  
Bernriederstraße 15, 94559 Niederwinkling  
Tel.: 0049 9962/ 2002-0, Fax: 0049 9962/ 2002-70  
E-Mail: info@intercontec.biz  
Web: www.intercontec.biz

\* for max. wire cross-section