





Test probes

PRUEF 2700

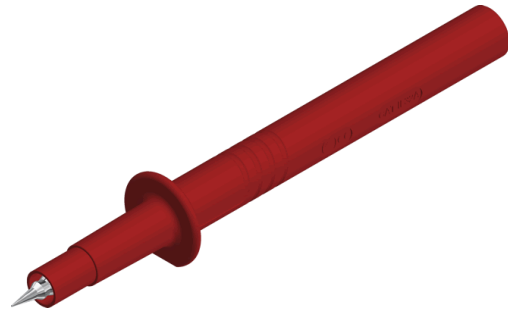

Product	PRUEF 2700
description	Safety test probe with dual function. Tip for penetrating oxide layers and 4 mm diameter pin for insertion in sockets. 4 mm diameter brass socket connection. Connects with safety measuring leads.
article-no. / *colour	9723191xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black </div> <div style="text-align: center;">  01 red </div> </div> <div style="text-align: right; border: 1px solid black; padding: 2px; width: 30px; margin-left: auto;">Ni</div>
drawing	
technical data	
connection	unsprung socket 4 mm
rated voltage ⁽¹⁾	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT II
rated current ⁽¹⁾ (consider derating curve)	32 A
material socket	brass, nickel plated
housing material	PP
temperature range acc. To IEC61010 ⁽²⁾	-25 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB
standard	IEC 61010

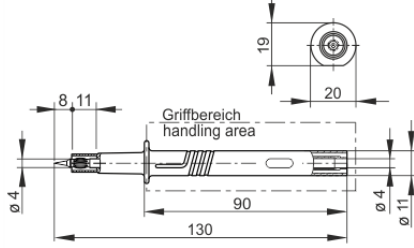4 mm safety system

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

stand: 03.07.2018