

**Technische Daten / Technical Data**


Durchgangswiderstand	< 30 m $\Omega$
Contact Resistance	< 30 m $\Omega$
Isolationswiderstand	> 1000 M $\Omega$
Insulation Resistance	> 1000 M $\Omega$
Spannungsfestigkeit	500 V AC
Test Voltage	500 V AC
Nennspannung	30 V RMS
Voltage Rating	30 V RMS
Nennstrom	1,5 A bei 25 °C
Current Rating	1,5 A at 25 °C
Temperaturbereich	0 °C ... +70 °C
Temperature Range	0 °C ... +70 °C

UL 2725, doppelt geschirmt, 2\*AWG28 + 2\*AWG24

UL 2725, double shielded, 2\*AWG28 + 2\*AWG24


Veredelung 30 $\mu$ " (0,75 $\mu$ m) Au im Kontaktbereich, entspr. **USB 2.0**

Plating 30 $\mu$ " (0.75 $\mu$ m) Au in contact area, according to **USB 2.0**

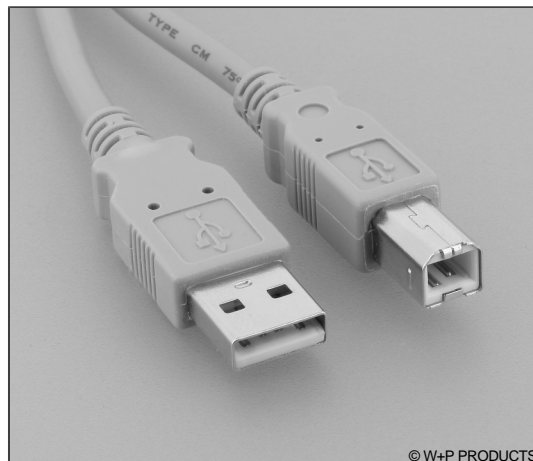


In schwarz und grau erhältlich  
 Weitere Farben auf Anfrage  
 Available in black and grey  
 More colours on request


Type 1: USB A male - USB A male

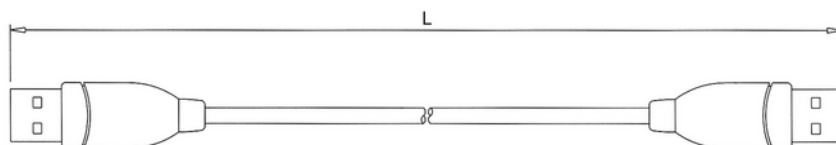


Type 2: USB A male - USB B male

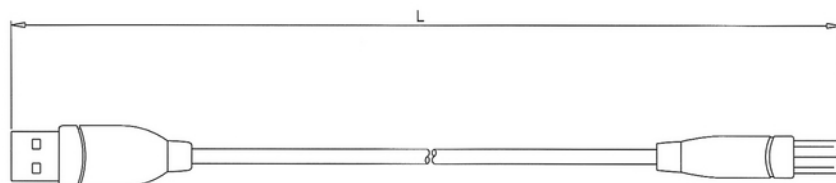

Type 3: USB B male - USB B male




Type 4: USB A male - Mini-USB B male

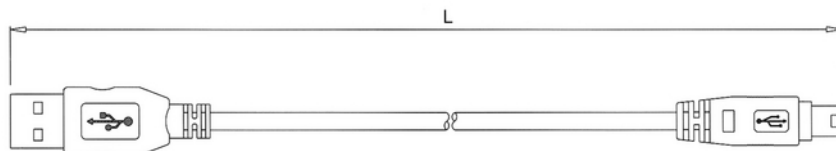


# 826

## USB / Mini-USB / Micro-USB Kabelkonfektionen USB / Mini-USB / Micro-USB Cable Assemblies


Type 5: USB A male - USB A female

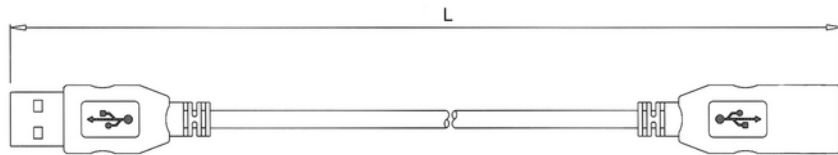



Type 6: Mini-USB A male - Mini-USB B male

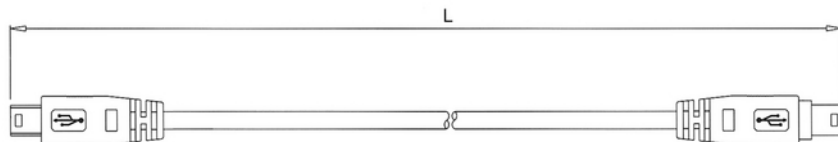

Type 7: USB B male - Micro-USB A male



Type 8: Micro-USB B male - Micro-USB B male

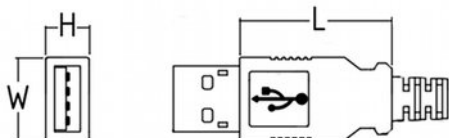

### Gehäusemaße / Housing Dimensions

Type	L x W x H
USB A Male (Type 1,2,4,5)	27.7 x 15.0 x 7.9mm
USB B Male (Type 2,3,7)	26.7 x 11.4 x 10.5mm
USB A Female (Type 5)	31.4 x 16.2 x 11.1mm
Mini USB B M (Type 4)	18.6 x 11.6 x 9.0mm
Mini USB A M (Type 6)	22.0 x 10.3 x 7.5mm
Mini USB B M (Type 6)	15.7 x 10.8 x 8.5mm
Micro USB A M (Type 7,8)	19.5 x 11.0 x 7.5mm

Series

**826**

Type\*

**1**

- 1 USB A (male) <=> USB A (male)
- 2 USB A (male) <=> USB B (male)
- 3 USB B (male) <=> USB B (male)
- 4 USB A (male) <=> Mini-USB B (05 contacts, male)
- 5 USB A (male) <=> USB A (female)
- 6 Mini-USB A (male) <=> Mini-USB B (male)
- 7 USB B (male) <=> Micro-USB A (male)
- 8 Micro-USB B (male) <=> Micro-USB B (male)

Length (L)\*

**100**

- 050 50cm
- 100 100cm
- 200 200cm
- 300 300cm
- 500 500cm

\* Dies ist ein **Bestellbeispiel** - bitte durch Ihre Spezifikationen ersetzen.

\* This is an **order example** - please replace by your specifications.